




BRANDON 90 mm

DESCRIPTION: Double-sided wall **TEXTURE:** Slate

PALLET OVERVIEW



COMPATIBLE CAPS

See page 103 for product compatibility.

NOTES

When building a double-sided wall one pallet will cover an average of 19.28 ft².

See page 99 to 119 for more technical information.

Specifications per pallet	Imperial	Metric
Cubing	20.44 ft²	1.90 m²
	69.23 lin. ft	21.10 lin. m
Approx. Weight	1 684 lbs	764 kg
Minimum radius	7.5 ft	2.3 m
Number of rows	10	
Coverage per row	2.04 ft ²	0.19 m ²
Linear coverage per row	6.92 lin. ft	2.11 lin. m



A




Unit dimensions	in	mm	Units /pallet
Height	3 ⁹ / ₁₆	90	20 units
Depth	9 ¹³ / ₁₆	250	
Length 1	11 ¹ / ₄	285	
Length 2	9 ⁵ / ₈	245	

B




Height	3 ⁹ / ₁₆	90	20 units
Depth	9 ¹³ / ₁₆	250	
Length 1	14 ³ / ₈	365	
Length 2	12 ¹³ / ₁₆	325	

C




Height	3 ⁹ / ₁₆	90	20 units
Depth	9 ¹³ / ₁₆	250	
Length 1	15 ¹⁵ / ₁₆	405	
Length 2	14 ³ / ₈	365	

01 | Linear pattern



02 | Linear pattern 90 mm & 180 mm



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

Visit our website for more patterns.


sandlewood




shale grey




chestnut brown



champlain grey



onyx black






BRANDON 180 mm

DESCRIPTION: Double-sided wall **TEXTURE:** Slate

PALLET OVERVIEW



COMPATIBLE CAPS

See page 103 for product compatibility.

NOTES

When building a double-sided wall one pallet will cover an average of 19.28 ft².

See page 99 to 119 for more technical information.

Specifications per pallet	Imperial	Metric
Cubing	20.44 ft²	1.90 m²
	34.61 lin. ft	10.55 lin. m
Approx. Weight	1 719 lbs	780 kg
Minimum radius	7.5 ft	2.3 m
Number of rows	5	
Coverage per row	4.09 ft ²	0.38 m ²
Linear coverage per row	6.92 lin. ft	2.11 lin. m



Unit dimensions	in	mm	Units /pallet
Height	7 ¹ / ₁₆	180	10 units
Depth	9 ¹³ / ₁₆	250	
Length 1	11 ¹ / ₄	285	
Length 2	9 ⁵ / ₈	245	

B




Height	7 ¹ / ₁₆	180	10 units
Depth	9 ¹³ / ₁₆	250	
Length 1	14 ³ / ₈	365	
Length 2	12 ¹³ / ₁₆	325	

C




Height	7 ¹ / ₁₆	180	10 units
Depth	9 ¹³ / ₁₆	250	
Length 1	15 ¹⁵ / ₁₆	405	
Length 2	14 ³ / ₈	365	

01 | Linear pattern



02 | Linear pattern

90 mm & 180 mm



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

Visit our website for more patterns.


sandlewood




shale grey




chestnut brown



champlain grey



onyx black






BRANDON 90 & 180 mm

DESCRIPTION: Pillars TEXTURE: Slate

PILLAR PALLET OVERVIEW



COMPATIBLE CAPS

See page 103 for product compatibility.

NOTES

See page 99 to 119 for more technical information.

Specifications per pallet		Imperial	Metric
PILLAR 90 mm	Cubing	40 units	40 units
	Approx. Weight	1 625 lbs	737 kg
	Number of rows	4	
	Pillar height	35 ⁷ / ₁₆ "	900 mm



A




Unit dimensions	in	mm	Units /pallet
Height	3 ⁹ / ₁₆	90	40 units
Depth	9 ¹³ / ₁₆	250	
Length	14 ³ / ₁₆	360	

Specifications per pallet		Imperial	Metric
PILLAR 180 mm	Cubing	20 units	20 units
	Approx. Weight	1 636 lbs	742 kg
	Number of rows	2	
	Pillar height	35 ⁷ / ₁₆ "	900 mm



A



Unit dimensions	in	mm	Units /pallet
Height	7 ¹ / ₁₆	180	20 units
Depth	9 ¹³ / ₁₆	250	
Length	14 ³ / ₁₆	360	


sandlewood




shale grey




chestnut brown



champlain grey






onyx black






CLEAN SAND/GRAVEL/ SAND AND GRAVEL MIXES ($\phi=34^\circ$, $\gamma = 120$ pcf)
GEOGRID: MIRAGRID 3XT BY TENCATE (RFd=1.10, RFcr=1.45, RFid=1.25, Cds=0.9, Ci=0.9)

CASE N° 1 :
No Surcharge
No Backslope
No Toe Slope

WALLS & PILARS



VISIT WWW.TECHO-BLOC.COM FOR COMPLETE DESIGN CHART DOCUMENT

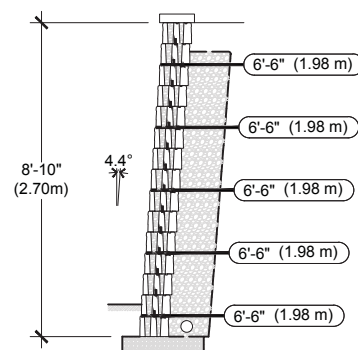


1. The information contained in the design charts is supplied for information purposes only and as such should only be used for preliminary designs.
2. The height (H) of the wall is the total height from the leveling pad to the top of the wall not including the thickness of the cap.
3. Soil parameters: reinforced soil ($\phi = 34^\circ$, $\gamma = 120$ pcf); retained soil ($\phi = 34^\circ$, $\gamma = 120$ pcf); foundation soil ($\phi = 34^\circ$, $\gamma = 120$ pcf)
4. A qualified engineer should be consulted for the final design to be used for construction.
5. The foundation soil must be able to support the wall system. The bearing capacity of the foundation soil, settlement, and global stability must be verified and validated by a qualified geotechnical engineer.
6. The seismic analysis is not included.
7. The design charts do not apply to tiered walls.
8. The charts assume that the walls are constructed in accordance with Techo-Bloc specifications, good construction practice and an adequate drainage system.
9. The geogrid layout has been optimized to satisfy the design requirements of the NCMA's Design Manual for Segmental Retaining Walls, 3rd Edition.
10. The minimum burial depth must be 6 in (150 mm) or 10% of the exposed height, whichever is greater.
11. Engineering judgement should be used when interpolating between heights.
12. Techo-Bloc and its predecessors, successors, beneficiaries, employees, associates, administrators and insurers accepts no liability for the incorrect use of information contained in the design charts.
13. For further information, please contact our technical service department.

INSTALLATION GUIDE


RETAINING WALLS - BRANDON 90 & 180 mm

1-Row Pattern | Laying Patterns

The 1-row pattern provides three different combinations. Each combination is 10.38' (3.165 m) long and 7 1/16" (180 mm) high. **This pattern can be used for installing the last row of modules or where other patterns cannot be used.**

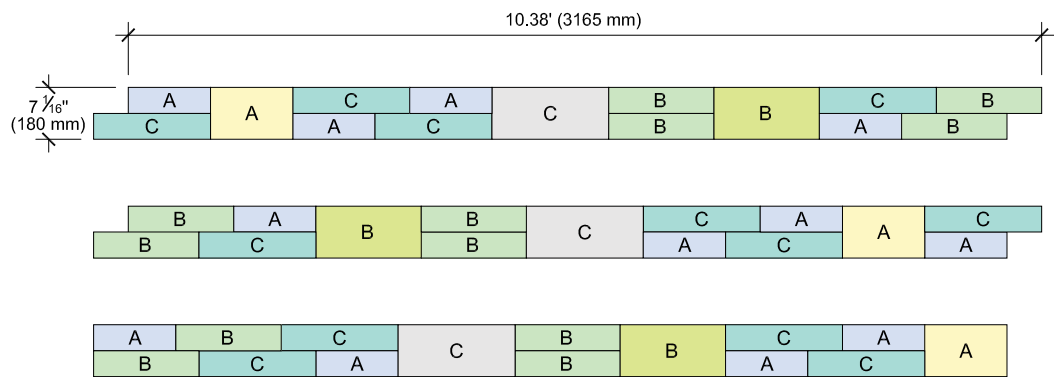

NUMBER OF BLOCKS REQUIRED	MODULE		
	A	B	C
BRANDON			
67% of the surface - Brandon 90 mm	4	4	4
33% of the surface - Brandon 180 mm	1	1	1

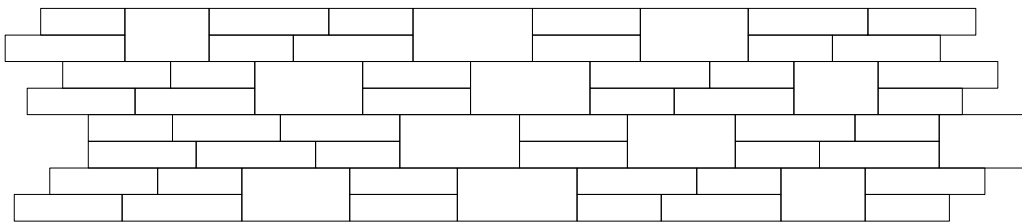


INSTALLATION GUIDE


RETAINING WALLS - BRANDON 90 & 180 mm

3-Row Pattern | Laying Patterns

The 3-row pattern is 10.38' (3.165 m) long and 21 1/4" (540 mm) high. This pattern allows a continuous leveled surface every 21 1/4"(540 mm), which corresponds to the recommended maximum spacing between the layers of geogrid in a Brandon wall. **This pattern is recommended when using the geogrid.**

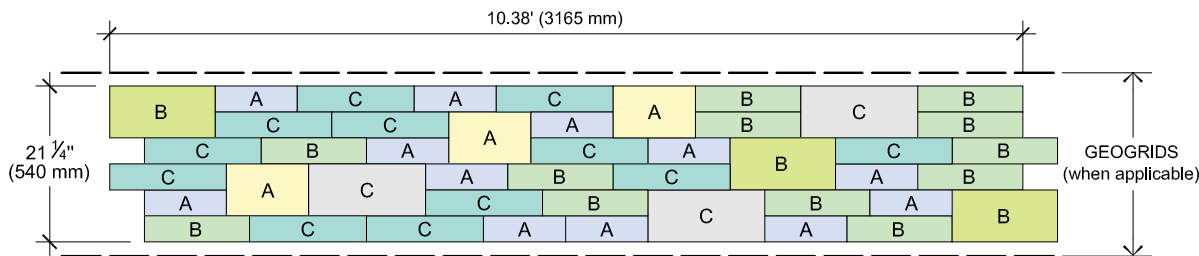

NUMBER OF BLOCKS REQUIRED	MODULE		
	A	B	C
BRANDON			
67% of the surface - Brandon 90 mm	12	12	12
33% of the surface - Brandon 180 mm	3	3	3

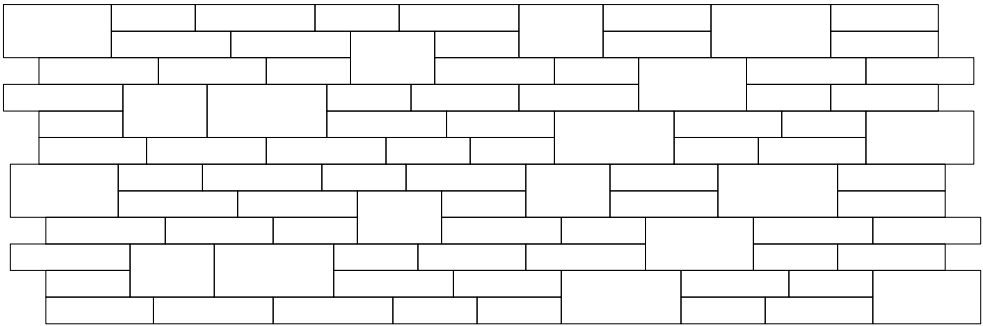


INSTALLATION GUIDE


RETAINING WALLS - BRANDON 90 & 180 mm

4-Row Pattern | Laying Patterns

The 4-row pattern is 10.38' (3.165 m) long and 28 3/8" (720 mm) high. **This pattern should be used only where the geogrid is not required.**

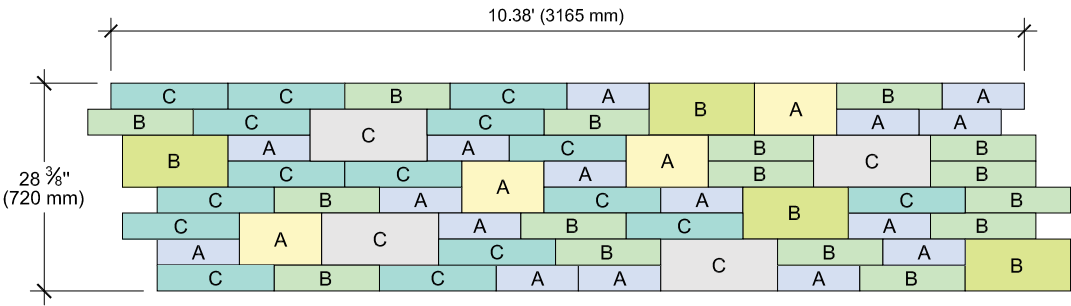


NUMBER OF BLOCKS REQUIRED	MODULE		
	A	B	C
BRANDON			
67% of the surface - Brandon 90 mm	16	16	16
33% of the surface - Brandon 180 mm	4	4	4

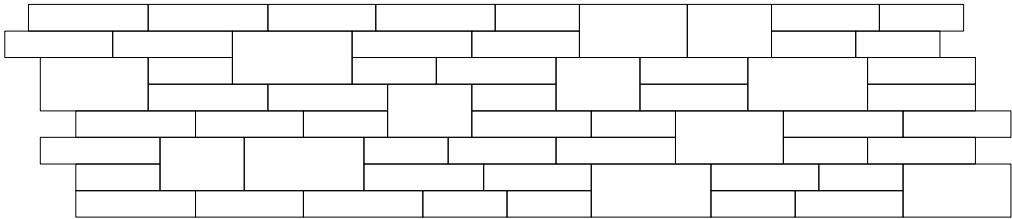

INSTALLATION GUIDE


FREESTANDING WALLS - BRANDON 90 & 180 mm

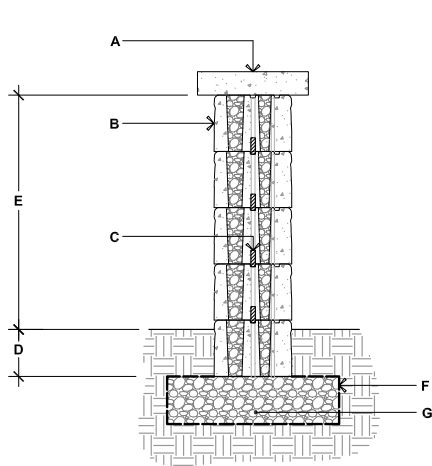

BRANDON 90 mm & 180 mm


- A. TECO-BLOC CAP UNIT SECURED TO UNIT BELOW WITH CONCRETE ADHESIVE
- B. BRANDON 90 mm AND 180 mm DOUBLE-SIDED WALL UNITS
SECURE EACH ROW WITH CONCRETE ADHESIVE
- C. CONNECTOR
- D. EMBEDMENT DEPTH, 6" (150 mm) MIN.
- E. 29 7/16" (750 mm) MAX.
- F. GEOTEXTILE
- G. COMPACTED GRANULAR LEVELING PAD, 6" (150 mm) THICK MIN. THICKNESS
ACCORDING TO PROJECT SPECIFIC CONDITIONS

90° CORNER OF A DOUBLE-SIDED WALL

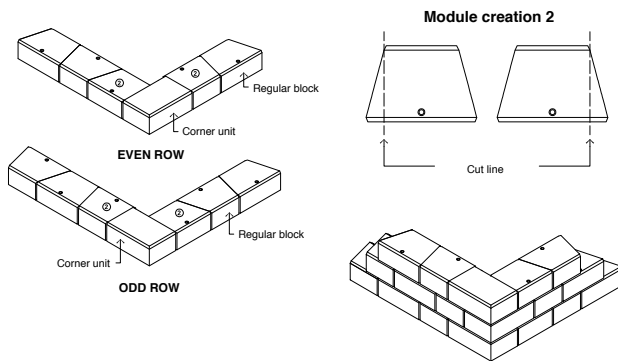

1. Alternate odd and even rows.
2. Stagger joints from one row to the next.
3. Glue all modules at each row with a concrete adhesive.
4. Cavities, grooves and connectors are not illustrated to avoid overloading the image.

DOUBLE-SIDED WALL - END OF A STRAIGHT WALL

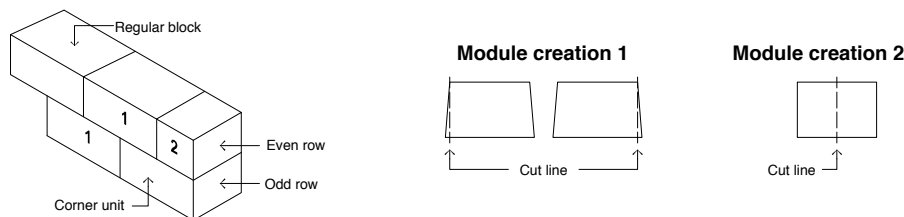


GENERAL NOTES

1. Alternate odd and even rows.
2. Stagger joints from one row to the next.
3. Glue all modules at each row with a concrete adhesive.
4. Cavities, grooves and connectors are not illustrated to avoid overloading the image.

INSTALLATION GUIDE


DOUBLE-SIDED WALL RADIUS - BRANDON 90 & 180 mm

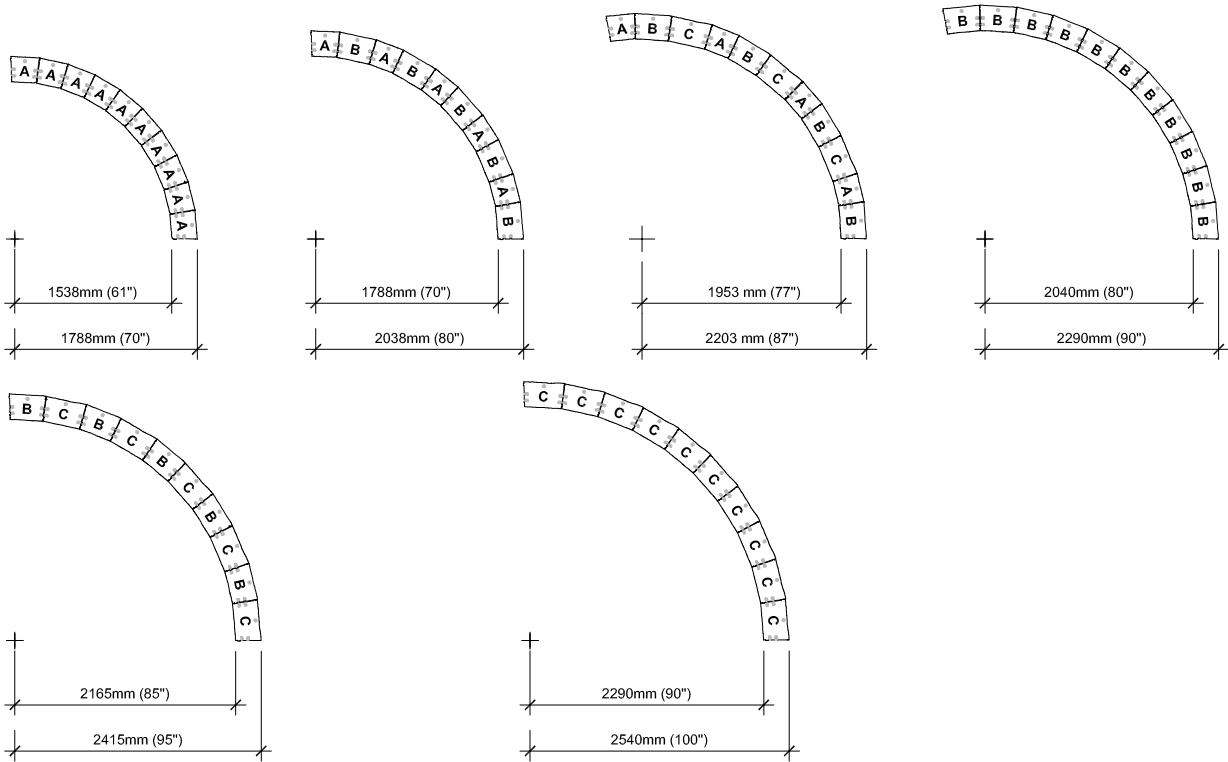


It is the user's responsibility to verify for the quantity of materials required.

STEPS

BRANDON 90 mm

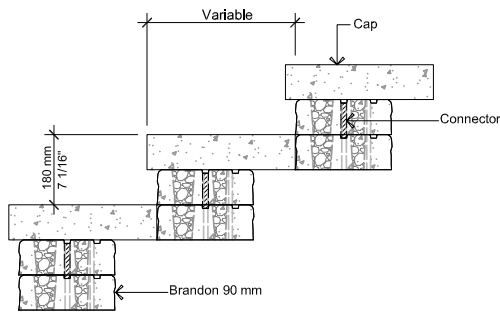


BRANDON 180 mm

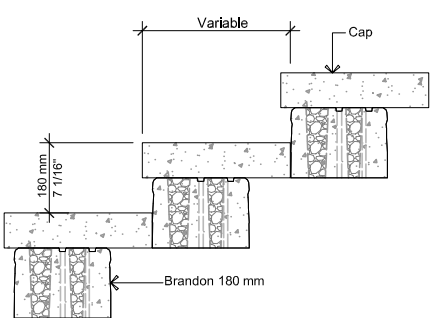

For all possible combinations of pillars and caps, please refer to the correspondence table on page 103


INSTALLATION GUIDE

PILLARS - BRANDON 90 & 180 mm

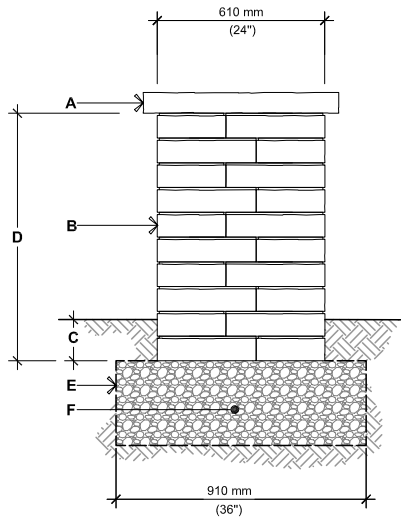

BRANDON 90 mm

- A. PILLAR CAP UNIT, SECURE TO UNITS BELOW WITH A CONCRETE ADHESIVE
- B. BRANDON 90 mm PILLAR UNIT
SECURE EACH ROW WITH CONCRETE ADHESIVE
- C. EMBEDMENT DEPTH: 150 mm (6") MIN.
- D. 900 mm (35 ⁷/₁₆"), HEIGHT PER PALLET
1 080 mm (42 ¹/₂"), MAXIMUM HEIGHT
- E. GEOTEXTILE
- F. COMPACTED GRANULAR BASE 150 mm (6")
THICK MIN. THICKNESS ACCORDING TO
PROJECT SPECIFIC CONDITIONS

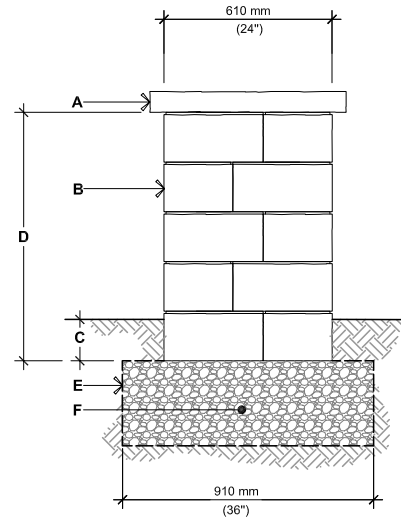


BRANDON 180 mm

- A. PILLAR CAP UNIT, SECURE TO UNITS BELOW WITH A CONCRETE ADHESIVE
- B. BRANDON 180 mm PILLAR UNIT
SECURE EACH ROW WITH CONCRETE ADHESIVE
- C. EMBEDMENT DEPTH: 150 mm (6") MIN.
- D. 900 mm (35 ⁷/₁₆"), HEIGHT PER PALLET
1 080 mm (42 ¹/₂"), MAXIMUM HEIGHT
- E. GEOTEXTILE
- F. COMPACTED GRANULAR BASE 150 mm (6")
THICK MIN. THICKNESS ACCORDING TO
PROJECT SPECIFIC CONDITIONS

For all possible combinations of pillars and caps, please refer to the correspondence table on page 103


INSTALLATION GUIDE

PILLARS - BRANDON 90 & 180 mm

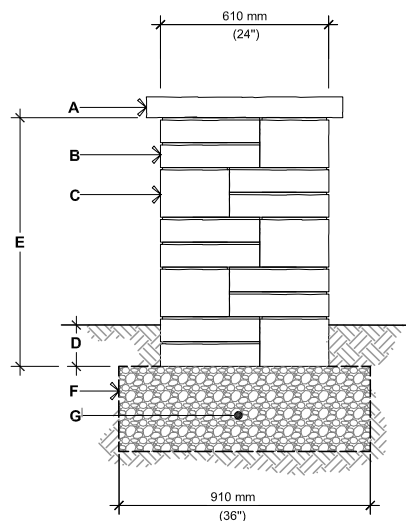

BRANDON 90 mm & 180 mm
OPTION A

- A.** PILLAR CAP UNIT, SECURE TO UNITS BELOW WITH A CONCRETE ADHESIVE
- B.** BRANDON 90 mm PILLAR UNIT
SECURE EACH ROW WITH CONCRETE ADHESIVE
- C.** BRANDON 180 mm PILLAR UNIT
SECURE EACH ROW WITH CONCRETE ADHESIVE
- D.** EMBEDMENT DEPTH: 150 mm (6") MIN.
- E.** 900 mm (35 ⁷/₁₆"),
1 080 mm (42 ¹/₂"), MAXIMUM HEIGHT
- F.** GEOTEXTILE
- G.** COMPACTED GRANULAR BASE 150 mm (6") THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS

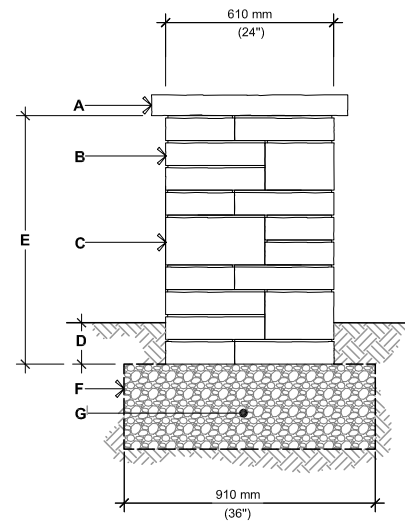


BRANDON 90 mm & 180 mm
OPTION B

- A.** PILLAR CAP UNIT, SECURE TO UNITS BELOW WITH A CONCRETE ADHESIVE
- B.** BRANDON 90 mm PILLAR UNIT
SECURE EACH ROW WITH CONCRETE ADHESIVE
- C.** BRANDON 180 mm PILLAR UNIT
SECURE EACH ROW WITH CONCRETE ADHESIVE
- D.** EMBEDMENT DEPTH: 150 mm (6") MIN.
- E.** 900 mm (35 ⁷/₁₆"),
1 080 mm (42 ¹/₂"), MAXIMUM HEIGHT
- F.** GEOTEXTILE
- G.** COMPACTED GRANULAR BASE 150 mm (6") THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS


For all possible combinations of pillars and caps, please refer to the correspondence table on page 103

INSTALLATION GUIDE

GRILL ISLAND - BRANDON 90 & 180 mm

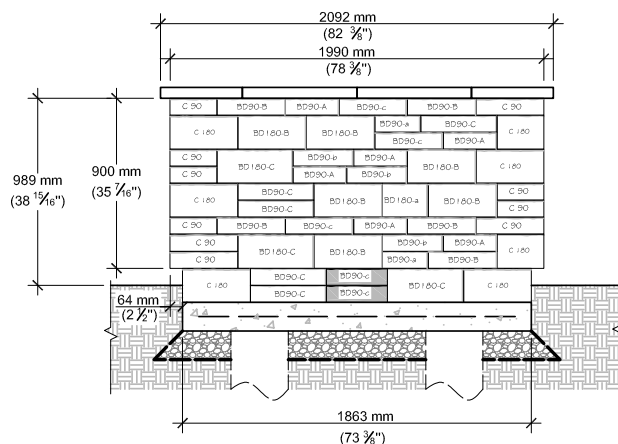


ELEVATION A

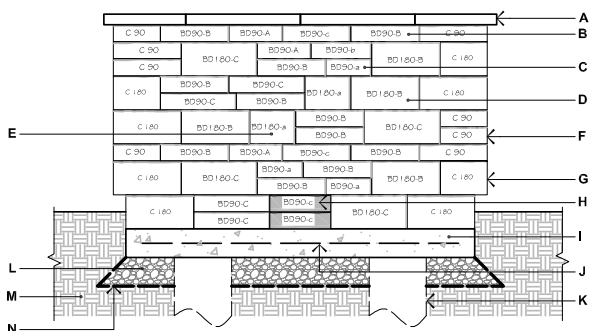


ELEVATION C


- A. YORK COUNTER TOP 24" × 36" × 2 1/4"
- B. BRANDON 90 MM UNIT (A, B OR C) – LONG FACE EXPOSED (SHOWN WITH UPPERCASE LETTER)
- C. BRANDON 90 MM UNIT (A, B OR C) – SHORT FACE EXPOSED (SHOWN WITH LOWERCASE LETTER)
- D. BRANDON 180 MM UNIT (A, B OR C) – LONG FACE EXPOSED (SHOWN WITH UPPERCASE LETTER)
- E. BRANDON 180 MM UNIT (A, B OR C) – SHORT FACE EXPOSED (SHOWN WITH LOWERCASE LETTER)
- F. BRANDON 90 MM PILLAR UNIT
- G. BRANDON 180 MM PILLAR UNIT
- H. BRANDON UNIT CUT ON FIELD
- I. CAST IN PLACE CONCRETE SLAB 4350 PSI (30 MPA), 5" (125 MM) THICK
- J. 4X4-4/4 (102X102-MW25.8XMW25.8) WELDED WIRE MESH AND/OR REBAR AS PER SITE CONDITIONS
- K. 12" (300 MM) DIA. CONCRETE PILLAR, AS PER LOCAL CODE
- L. 3/4" (20 MM) CLEAN STONE 6" (150 MM) THICK MIN. AS PER SITE CONDITIONS
- M. NATURAL SOIL OR COMPACTED BACKFILL
- N. GEOTEXTILE

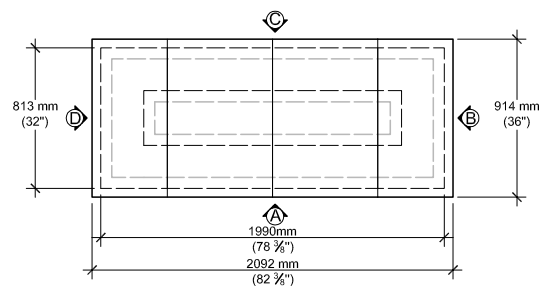

TOP VIEW

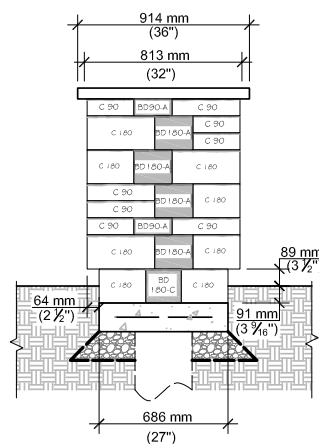

ELEVATION B



ELEVATION D


QUANTITY OF MATERIALS REQUIRED

- York Counter top 24" × 36" × 2 1/4": **4**
- Brandon 90 mm unit: **20 A, 20 B, 18 C**
- Brandon 180 mm unit: **10 A, 10 B, 9 C**
- Brandon 90 mm Pillar unit: **18**
- Brandon 180 mm Pillar unit: **15**

NOTE: Appliances and utilities may vary for each project and are not shown on this drawing. This drawing is shown for inspiration only and surplus or shortage of materials may result. It is the user's responsibility to verify for the quantity of materials required. Secure the blocks using a heat resistant concrete adhesive. The installer must ensure that the installation and use of the grill island comply with local regulations and code requirements. Concrete pillars extending to frost line may be required as per local code. Check your local building code before installing.

INSTALLATION GUIDE

PIZZA OVEN - BRANDON 90 & 180 mm

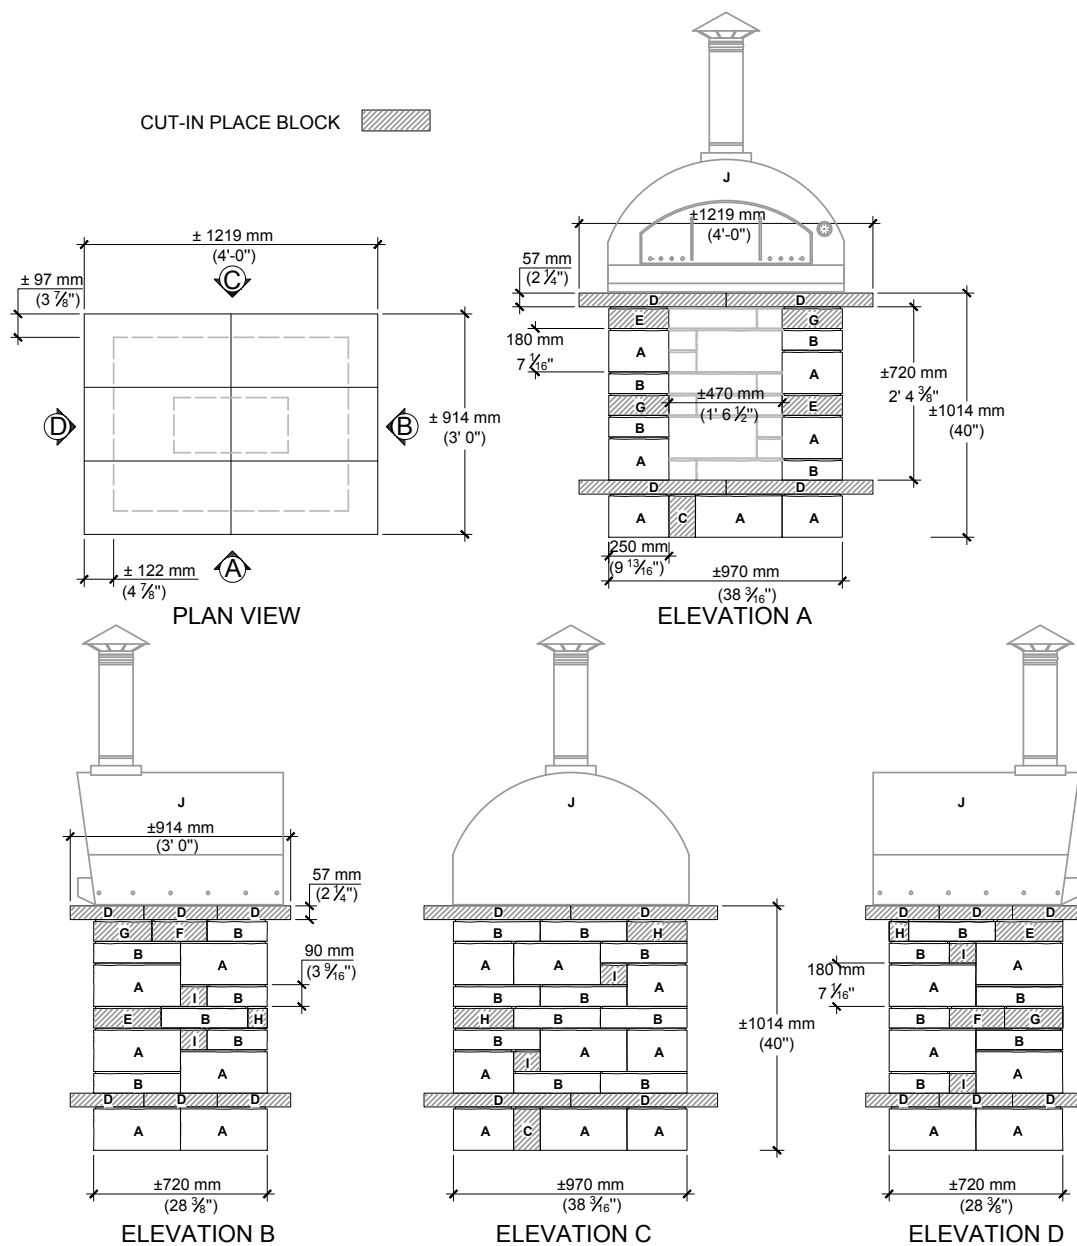

A. BRANDON 180 mm PILLAR UNIT:	$7 \frac{1}{16}'' \times 9 \frac{13}{16}'' \times 14 \frac{3}{16}''$ (180 x 250 x 360 mm)	16 U.	F. BRANDON 90 mm PILLAR UNIT:	$3 \frac{9}{16}'' \times 9 \frac{13}{16}'' \times 9''$ (90 x 250 x 229 mm)	2 U.
B. BRANDON 90 mm PILLAR UNIT:	$3 \frac{9}{16}'' \times 9 \frac{13}{16}'' \times 14 \frac{3}{16}''$ (90 x 250 x 360 mm)	16 U.	G. BRANDON 90 mm PILLAR UNIT:	$3 \frac{9}{16}'' \times 9 \frac{13}{16}'' \times 9 \frac{1}{2}''$ (90 x 250 x 241 mm)	2 U.
C. BRANDON 180 mm PILLAR UNIT:	$7 \frac{1}{16}'' \times 9 \frac{13}{16}'' \times 4 \frac{5}{16}''$ (180 x 250 x 110 mm)	2 U.	H. BRANDON 90 mm PILLAR UNIT:	$3 \frac{9}{16}'' \times 9 \frac{13}{16}'' \times 3 \frac{3}{16}''$ (90 x 250 x 81 mm)	2 U.
D. CAP PIEDIMONTE 12X30:	$2 \frac{1}{4}'' \times 11 \frac{3}{4}'' \times 24''$ (57 x 298 x 610 mm)	12 U.	I. BRANDON 90 mm PILLAR UNIT:	$3 \frac{9}{16}'' \times 9 \frac{13}{16}'' \times 4 \frac{5}{16}''$ (90 x 250 x 110 mm)	6 U.
E. BRANDON 90 mm PILLAR UNIT:	$3 \frac{9}{16}'' \times 9 \frac{13}{16}'' \times 11''$ (90 x 250 x 279 mm)	2 U.	J. FORNO APPLIANCE:		1 U.

NOTE : Secure the blocks using a heat resistant concrete adhesive. The installer must ensure that the installation and use of the pizza oven comply with local regulations and code requirements. The construction of the base should include the installation of a concrete slab and pillars under the slab. The depth of the pillars and reinforcement requirements should be determined based on site conditions and comply with local code.